
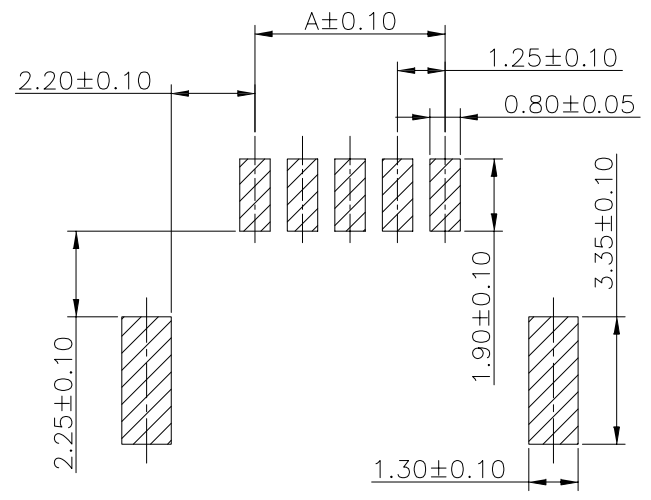





RoHS
HF

SPECIFICATIONS
 Current Rating: 1A AC,DC
 Voltage Rating: 125V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 20mΩ Max.
 Insulation Resistance: 100MΩ Min.
 Withstanding Voltage: 500V AC/minute
 Contact: Brass/Matte Tin-plated
 Solder Tabs: Brass/Matte Tin-plated
 Insulator: Thermal Plasticity Resin, UL 94V-0
 Halogen Free
 Color: Natural(Beige)

Circuits	Dimensions	
	A	B
2P	1.25	7.65
3P	2.50	8.90
4P	3.75	10.15
5P	5.00	11.40
6P	6.25	12.65
7P	7.50	13.90
8P	8.75	15.15
9P	10.00	16.40
10P	11.25	17.65
11P	12.50	18.90
12P	13.75	20.15
14P	16.25	22.65
15P	17.50	23.90
16P	18.75	25.15
20P	23.75	30.15
30P	36.25	42.65

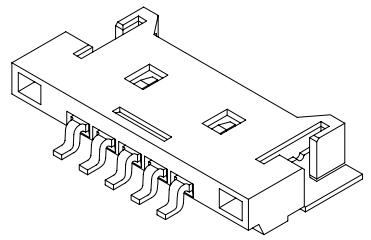

P.C.B. LAYOUT

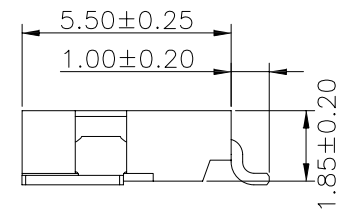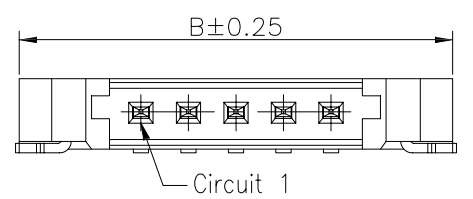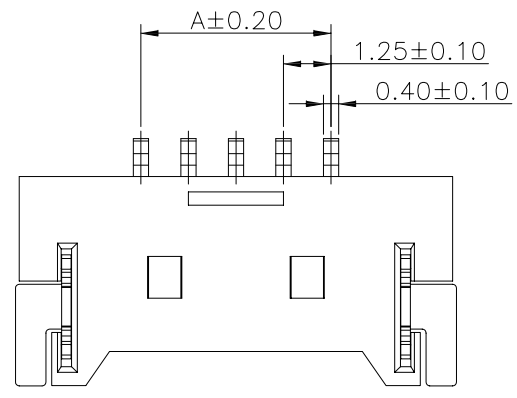

REV.	REVISION RECORD	DATE	UNIT: MM	GENERAL TOLERANCES		SCALE:	NAME	DATE	■ 苏州伟聚 □ 东莞胜景 □ 东莞胜蓝 □ 东莞富强	PART.NO:	
					LINEAR	ANGLES	APPROVED				
				0.0 ±0.30	X'REF± 6°	DESIGNER				DWG.NO:	
				0.00 ±0.20	X' ± 3'	DRAWN				11255W90-NP-S-HF	
			SIZE: A4	0.000±0.10	X'X' ± 2'					REV: A	SHEET: 1/2

JCTC[®]
 TERMINAL & CONNECTORS

TITLE:
 1.25mm PITCH 90° SMT TYPE WAFER